


NO	REVISION	DATE	CHK	APP
△				
△				
△				

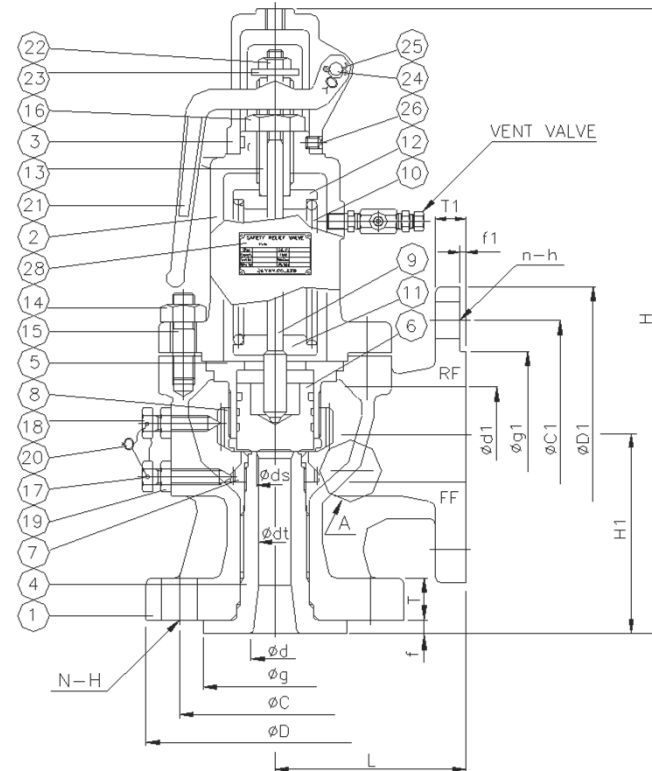

* CAP SET SCREW

VALVE SIZE	Q'TY
25A - 80A	2
100A - 200A	3

* STUD BOLT / NUT

VALVE SIZE	Q'TY
25A	4
32A - 80A	6
100A - 200A	8

* SPRING MATERIAL

MAT'L	REMARK
SWOSC-B	
SUP 9	
SUS 304	
SUS 316	
INCONEL	
ALLOY STEEL	

SPECIFICATION

- 1. APPLICABLE FLUIDS : AIR, VAPOR, STEAM
- 2. SERVICE SYSTEM : -
- 3. DESIGN TEMPERATURE : 220 °C
- 4. DESIGN PRESSURE : 30.0 kgf/cm²
- 5. SETTING PRESSURE : - kgf/cm²
- 6. HYDRO. TEST PRESSURE : DESIGN PRESSURE X 1.5

NO	PART NAME	MATERIAL	Q'TY	REMARK
28	NAME PLATE	SUS 304	1	
27	PLUG	SUS F304	1	
26	CAP SET SCREW	SUS 304	-	SEE TABLE
25	SPLIT PIN	SUS 304	1	
24	PIN	SUS 304	1	
23	STEM WASHER	SUS 304	1	
22	LOCK NUT	SUS 304	1	
21	LEVER	SCS 13	1	
20	SEAL	Pb	2	
19	LOCK NUT	SUS 304	2	
18	SET SCREW(UP)	SUS 304	1	
17	SET SCREW(LOW)	SUS 304	1	
16	LOCK NUT	SUS 304	1	
15	STUD BOLT	SUS 304	-	SEE TABLE
14	NUT	SUS 304	-	SEE TABLE
13	ADJUST SCREW	SUS 304	1	
12	SPRING SEAT(UP)	SUS 304	1	
11	SPRING SEAT(LOW)	SUS 304	1	
10	SPRING	SEE TABLE	1	
9	VALVE STEM	SUS 304	1	
8	ADJUST RING(UP)	SCS 14	1	
7	ADJUST RING(LOW)	SCS 14	1	
6	DISC	SUS 304	1	STELLITED
5	DISC GUIDE	SCS 13	1	
4	SEAT	SCS 13	1	STELLITED
3	CAP	SCS 13	1	
2	BONNET	SCS 13	1	
1	BODY	SCS 13	1	

* DIMENSION

SIZE d x d1	Ødt	Øds	L	H1	H	INLET FLANGE						OUTLET FLANGE						W.T (Kg)	Q'ty (EA)						
						JIS B 2220			30K			RF			JIS B 2220					10K			FF		
						ØD	Øg	ØC	T	f	N-H	ØD1	Øg1	ØC1	T1	f1	n-h			ØD1	Øg1	ØC1	T1	f1	n-h
25A x 40A	19.0	22.0	100.0	104.0	324.0	130.0	70.0	95.0	20.0	7.0	4-19	140.0	-	105.0	16.0	-	4-19	11.0							
25A x 50A	19.0	22.0	100.0	104.0	324.0	130.0	70.0	95.0	20.0	7.0	4-19	155.0	-	120.0	16.0	-	4-19	11.4							
32A x 65A	30.0	35.0	115.0	123.0	419.0	140.0	80.0	105.0	22.0	8.0	4-19	175.0	-	140.0	18.0	-	4-19	19.0							
40A x 50A	30.0	35.0	115.0	123.0	419.0	160.0	90.0	120.0	22.0	8.0	4-23	155.0	-	120.0	16.0	-	4-19	19.0							
40A x 65A	30.0	35.0	115.0	123.0	419.0	160.0	90.0	120.0	22.0	8.0	4-23	175.0	-	140.0	18.0	-	4-19	19.7							
40A x 80A	30.0	35.0	128.0	130.0	434.0	160.0	90.0	120.0	22.0	8.0	4-23	185.0	-	150.0	18.0	-	8-19	21.3							
50A x 80A	38.0	44.0	128.0	130.0	478.0	165.0	105.0	130.0	22.0	9.0	8-19	185.0	-	150.0	18.0	-	8-19	25.2							
65A x 100A	49.0	57.0	145.0	145.0	544.0	200.0	130.0	160.0	26.0	10.0	8-23	210.0	-	175.0	18.0	-	8-19	37.5							
80A x 100A	49.0	57.0	145.0	145.0	544.0	210.0	140.0	170.0	28.0	10.0	8-23	210.0	-	175.0	18.0	-	8-19	38.7							
80A x 125A	61.0	71.0	162.0	168.0	600.0	210.0	140.0	170.0	28.0	12.0	8-23	250.0	-	210.0	20.0	-	8-23	52.8							
100A x 150A	76.0	88.0	190.0	197.0	725.0	240.0	160.0	195.0	32.0	12.0	8-25	280.0	-	240.0	22.0	-	8-23	84.3							
125A x 200A	95.0	114.0	220.0	222.0	900.0	275.0	195.0	230.0	36.0	15.0	8-25	330.0	-	290.0	22.0	-	12-23	135.3							
150A x 200A	115.0	133.0	225.0	230.0	961.0	325.0	235.0	275.0	38.0	15.0	12-27	330.0	-	290.0	22.0	-	12-23	162.3							
200A x 250A	150.0	175.0	270.0	270.0	1094.0	370.0	280.0	320.0	42.0	15.0	12-27	400.0	-	355.0	24.0	-	12-25	283.0							

Unit : mm

TITLE		SAFETY & RELIEF VALVE				MODEL NO.		FSV-3F(L)	
DES	CHE	APP	DATE	2020-02-14	DRAWING NO		REV		
J.M.JEONG	Y.S.SEO	S.M.JANG	SCALE	N/S	YNV 137100 - J E 00				

YNV YNV CO.,LTD

UNIT (INCH) (MM)