
NO	REVISION	DATE	CHK.	APP.
1				
2				
3				

SPECIFICATION

1. APPLICABLE FLUID : STEAM
2. DESIGN PRESSURE : 20.0 kgf/cm²g
3. DESIGN TEMPERATURE : 220 °C
4. HYDRO. TEST PRESSURE : 1.5 TIME OF WORKING PRESSURE
5. PAINTING : HEAT RESISTANCE SILVER COLOR EXCEPT BRASS & STAINLESS MATERIAL.

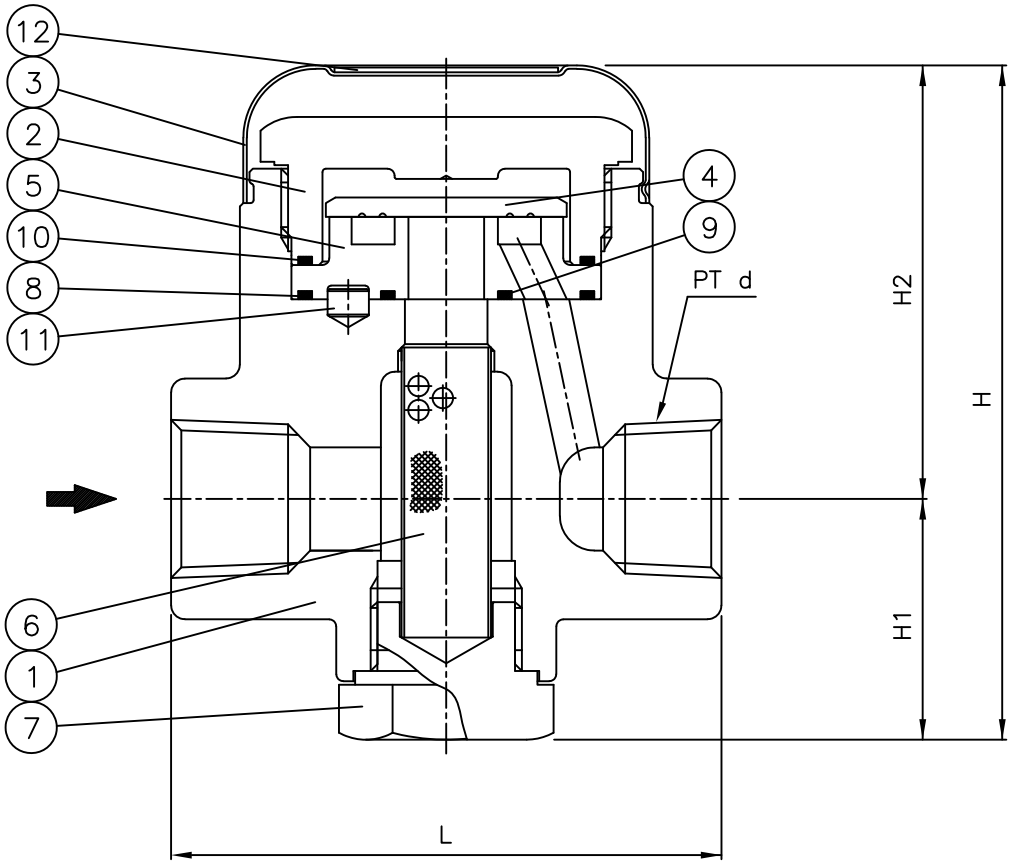

DIMENSION UNIT : mm

SIZE	PT d	L	H1	H2	H	WEIGHT (Kg)	Q'TY (set)
15A	1/2"	80.0	30.0	63.0	93.0		
20A	3/4"	80.0	30.0	63.0	93.0		
25A	1"	90.0	35.0	68.0	103.0		

NO.	DESCRIPTION	MAT'L	Q'TY	REMARK
12	NAME PLATE	SUS 304	1	
11	PIN	SUS 304	1	
10	CAP GASKET	PTFE	1	
09	SEAT GASKET(IN)	PTFE	1	
08	SEAT GASKET(OUT)	PTFE	1	
07	PLUG	SUS 304	1	
06	SCREEN	SUS 304	1	
05	SEAT	SUS 410	1	
04	DISC	SUS 420J2	1	
03	INSULATION CAP	SUS 304	1	
02	CAP	SCS 13	1	
01	BODY	SCS 13	1	

DES	CHE	APP	DATE	2020.09.04
J.M.JEONG	Y.S.SEO	S.M.JANG	SCALE	N S

D.W.G NAME	MODEL NO
20 Kgf/cm² STEAM TRAP (DISC TYPE)	DST-4S

YNV CO.,LTD

D.W.G NO	REV.
YNV517200-JD00	0