


NO	REVISION	DATE	CHK.	APP.
△				
△				
△				

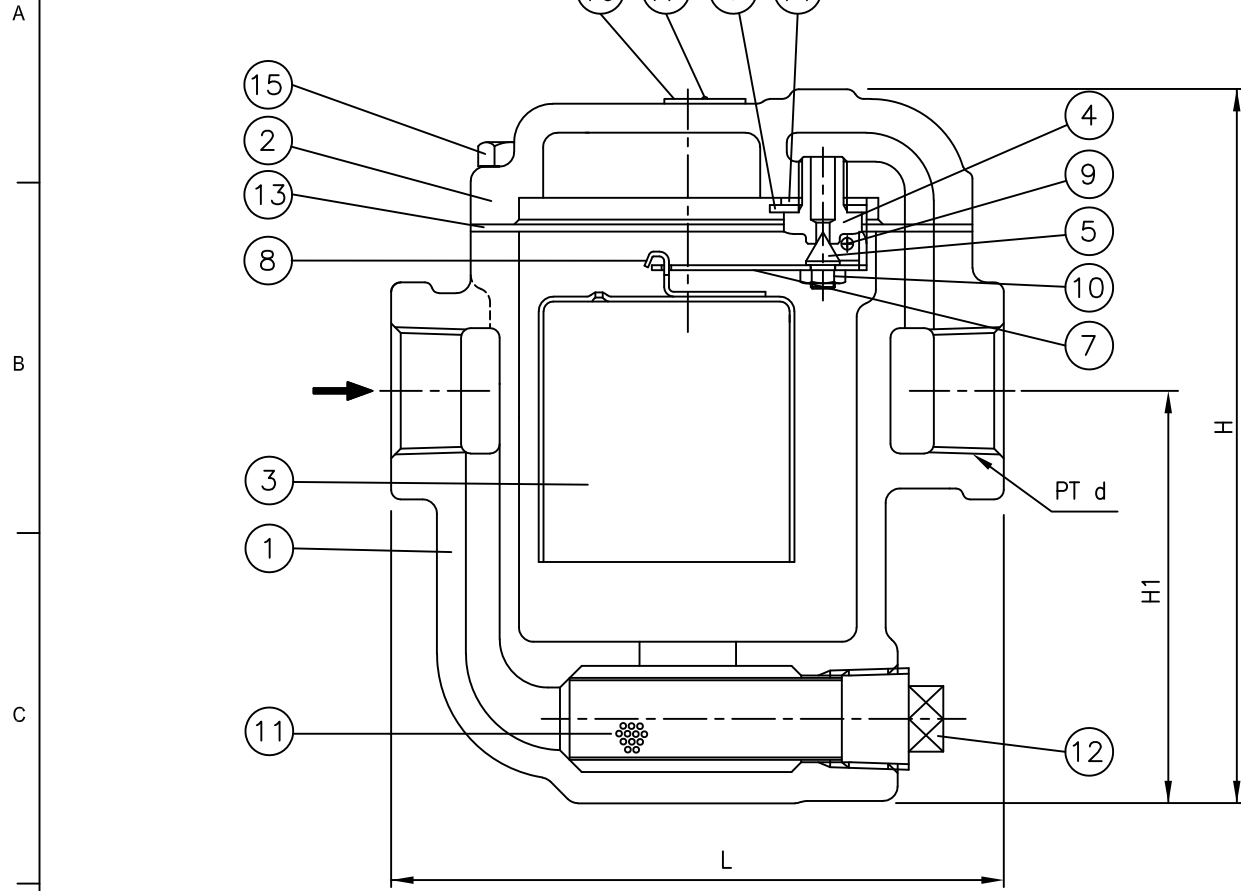

SPECIFICATION

1. APPLICABLE FLUID : STEAM
2. DESIGN PRESSURE : 8.0, 16.0 kgf/cm²g
3. DESIGN TEMPERATURE : 220 °C
4. HYDRO. TEST PRESSURE :
1.5 TIME OF WORKING PRESSURE
5. PAINTING : HEAT RESISTANCE SILVER COLOR
EXCEPT BRASS & STAINLESS MATERIAL.

17	RIVET	SUS 304	1	
16	NAME PLATE	SUS 304	1	
15	BOLT	SNB 7	1	
14	SEAT GASKET	GRAPHITE	1	
13	BODY GASKET	GRAPHITE	1	
12	PLUG	BRASS	1	
11	SCREEN	SUS 304	1	
10	NUT	SUS 304	1	
09	PIN	SUS 304	1	
08	LINK	SUS 304	1	
07	LEVER	SUS 304	1	
06	BRACKET	SUS 304	1	
05	DISC	SUS 304	1	
04	SEAT	SUS 304	1	
03	BUCKET	SUS 304	1	
02	BONNET	FCD 450	1	
01	BODY	FCD 450	1	

DIMENSION UNIT : mm

SIZE	PT d	L	H1	H	WEIGHT (Kg)	Q'TY (set)
15A	1/2"	127.0	85.0	155.0	2.8	
20A	3/4"	127.0	85.0	155.0	2.8	
25A	1"	137.0	87.0	170.0	3.2	

NO.	DESCRIPTION	MAT'L	Q'TY	REMARK
	DES	CHE	APP	DATE
				2023.01.12
				SCALE
	H.J.KIM	Y.S.SEO	S.M.JANG	N S
D.W.G NAME			MODEL NO	
STEAM TRAP (BUCKET TYPE)			BKT-1S	
			D.W.G NO	REV.
			YNV521200-JC00	0

