
NO	REVISION	DATE	CHK.	APP.
⚠1				
⚠2				
⚠3				

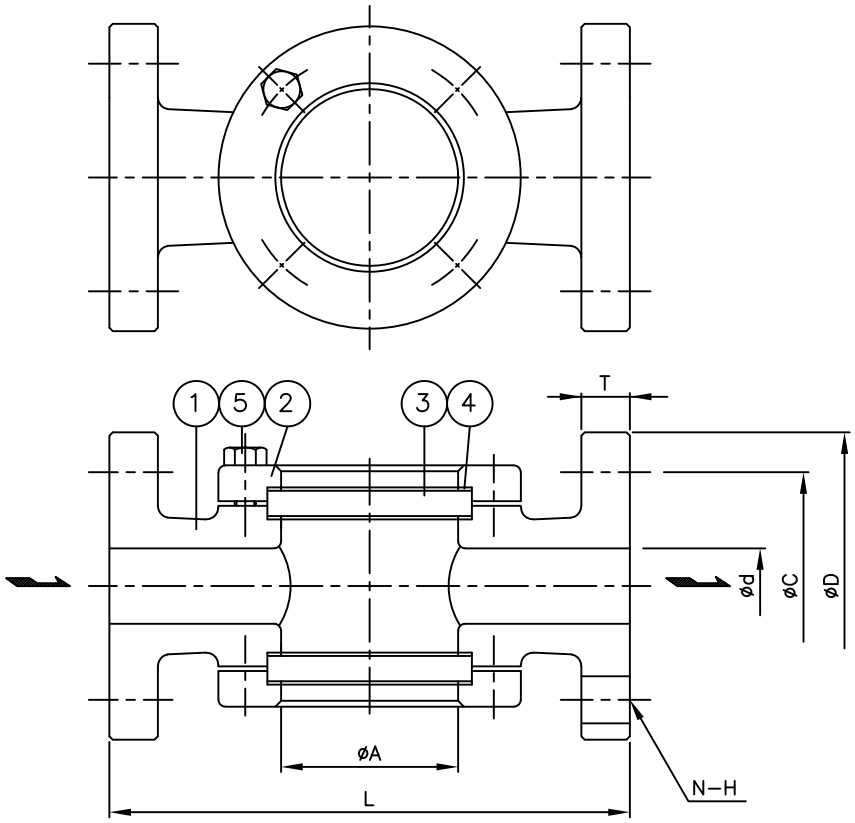

SPECIFICATION

1. APPLICABLE FLUID : Liquid, Oil
2. DESIGN PRESSURE : 10.0 kgf/cm²g
3. DESIGN TEMPERATURE : 150 °C
4. HYDRO. TEST PRESSURE :
   1.5 TIME OF DESIGN PRESSURE
5. PAINTING : HEAT RESISTANCE SILVER COLOR
   EXCEPT BRASS & STAINLESS MATERIAL.

DIMENSION UNIT: mm

SIZE	d	L	øA	FLANGE JIS B 2220 10K FF (KS B 1503)						W.T (kg)	Q'TY (set)
				D	g	C	T	f	N–H		
15A	15	150	40	95	–	70	13	–	4–15	3.0	
20A	20	150	40	100	–	75	15	–	4–15	3.5	
25A	25	170	50	125	–	90	17	–	4–19	5.5	
32A	32	175	65	135	–	100	18	–	4–19	8.0	
40A	40	200	65	140	–	105	18	–	4–19	8.5	
50A	50	220	80	155	–	120	18	–	4–19	11.0	

NO.	DESCRIPTION	MAT'L	Q'TY	REMARK
05	BOLT	SS 400	8	
04	GASKET	NON-ASBESTOS	4	
03	GLASS	GLASS	2	
02	BONNET	SC 480	2	
01	BODY	SC 480	1	

DES	CHE	APP	DATE	2020.08.19
J.M.JEONG	Y.S.SEO	S.M.JANG	SCALE	N S

D.W.G NAME	MODEL NO
SIGHT GLASS 10.0 Kgf/cm²g	DUG–2F

YNV CO.,LTD

D.W.G NO	REV.
YNV812100-JB00	0